

THE IDEAL GUARD

Installed on a roof, the "**Ideal Guard**" helps protect against falling ice, snow, and can be installed on any type of roof (metal, shingle, slate, tile and cedar shakes).

The "Ideal Guard" components are:

*1/8" (3.2mm) thick Galvanized G-90 steel brackets with one, or more 1 1/4" (32mm) diameter holes inserted with a special plastic protector. Each bracket includes: 8 screws (14 x 2 HHA), with neoprene washers;

*A Galvanized G-90 steel tube of 1/16" (1.5mm) thick x 1" (25.4mm) diameter x 4' (1.21m) long with a reduced 3" (75mm) ferrule 45" (1.14m) coverage.



The "Ideal Guard" is offered in ten standard colors:

- | | |
|----------------------|------------------------|
| Black (ID 8262) | White (ID 8317) |
| Stone Grey (ID 8305) | Coffee (ID 8326) |
| Red (ID 8250) | Forest Green (ID 8307) |
| Bright Red (ID 8386) | Medium Green (ID 8329) |
| Charcoal (ID 8306) | Slate Blue (ID 8260) |

Also available in Galvanized G-90 steel and all other colors (upon request).




Recommendations:

Brackets should be installed at 2 feet centres for an 800 pound distributed load.

- | | |
|--------------------------------|-----------------------|
| Fastening requirements / wood | Minimum 3/4"(19mm) |
| Fastening requirements / Steel | Minimum 0.49"(1.25mm) |


Take note: 1, 2, 3, or 4 hole brackets available.

Upon type of application, climatic situation and slope of the roof, another type of attachment could be requested. We release ourselves from any responsibility relative to the installation.

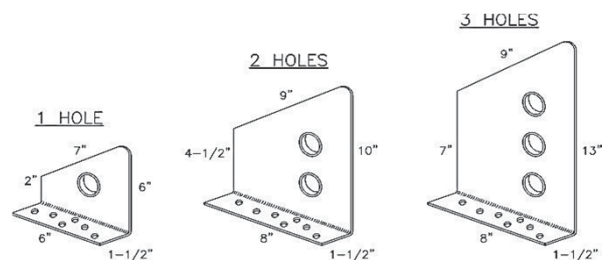

1418, Michael Street / Ottawa / Ontario / K1B 3R2
 Phone: (614) 746-3206 / Fax: (614) 746-0445
 info@idealroofing.ca / www.idealroofing.com

N.B. The distance between the tubes is 1 3/4" (44mm)

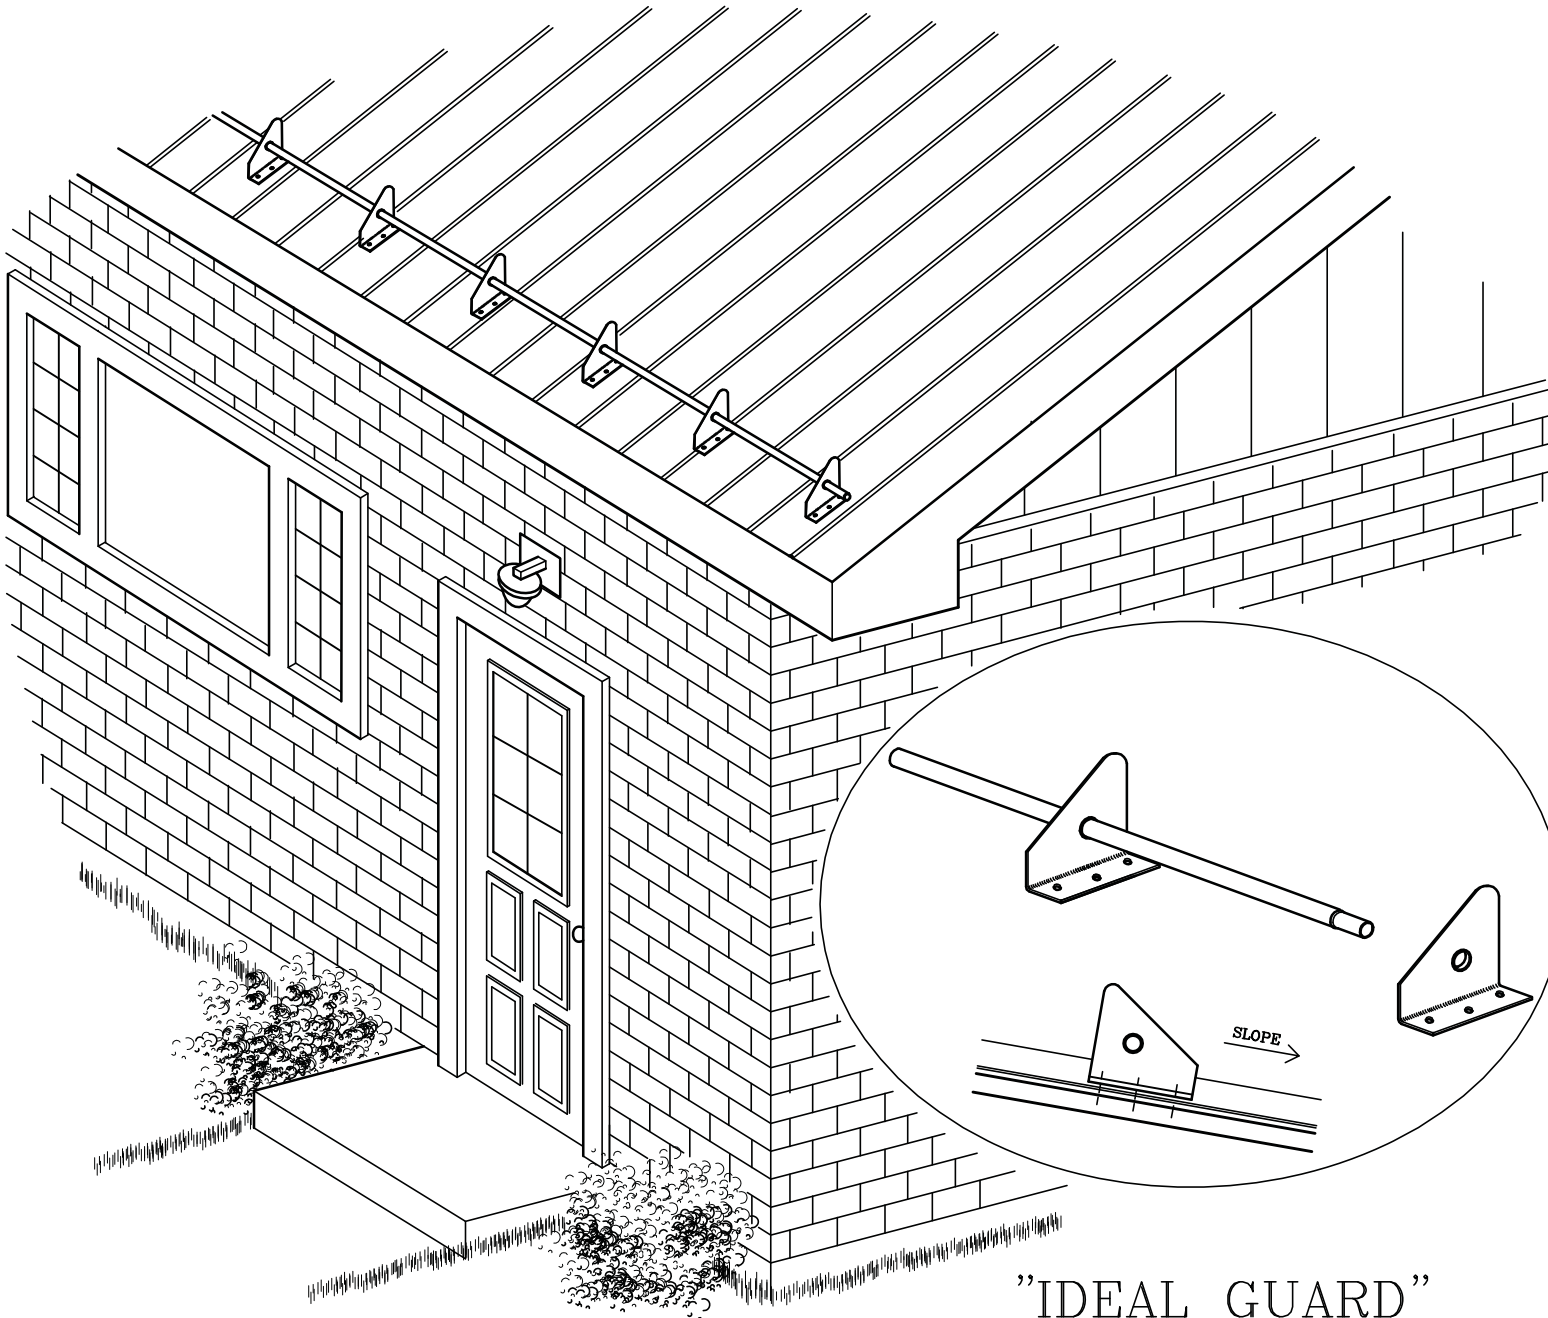

"IDEAL GUARD"
(BRACKETS; 1 HOLE)

IDEALGRD1.DWG REV. 19 DEC '02



"IDEAL GUARD"
"GARDE IDEAL"

TEL. (613) 746-3206 FAX (613) 746-0445

